


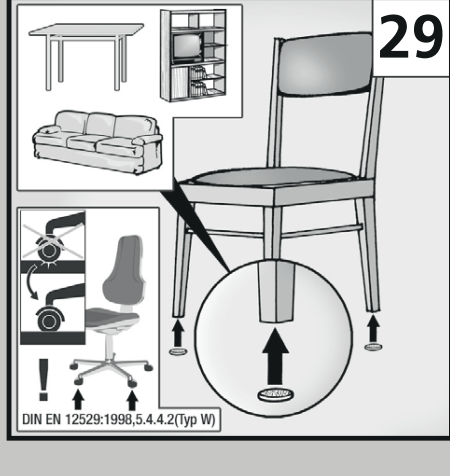
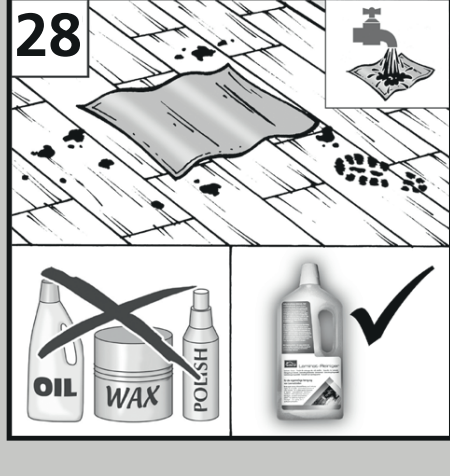
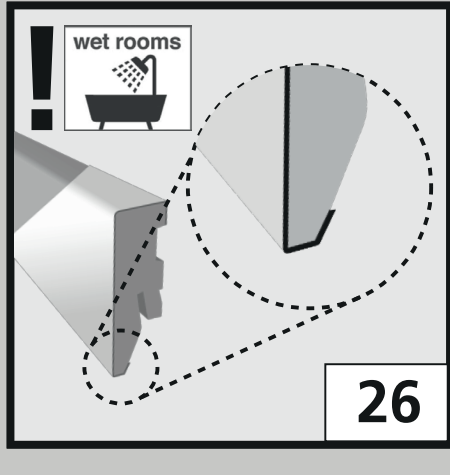
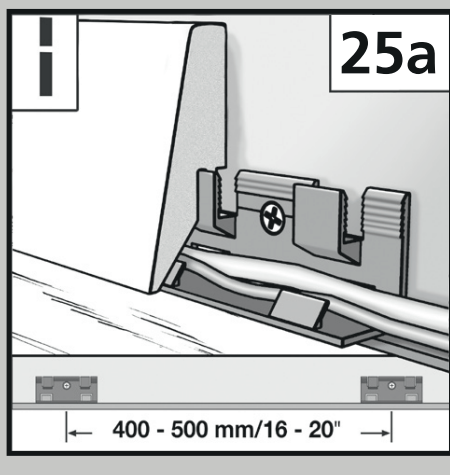
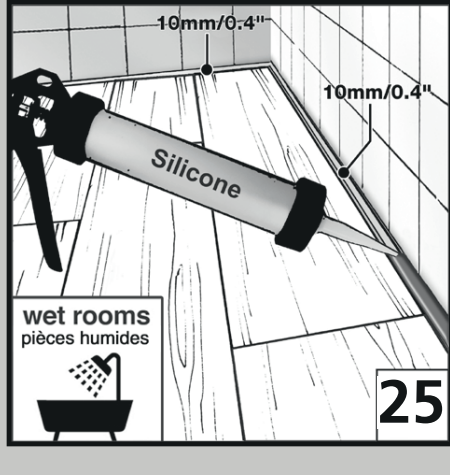
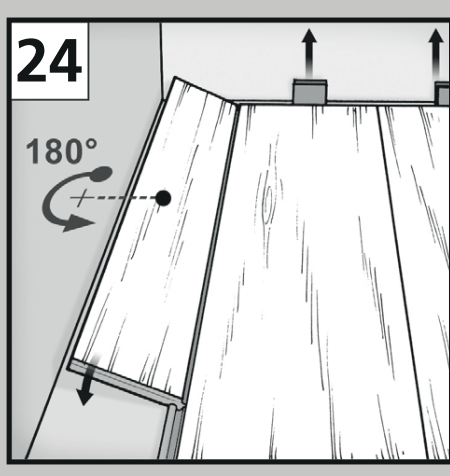
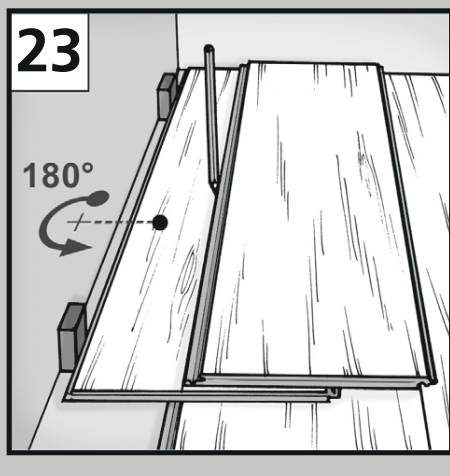
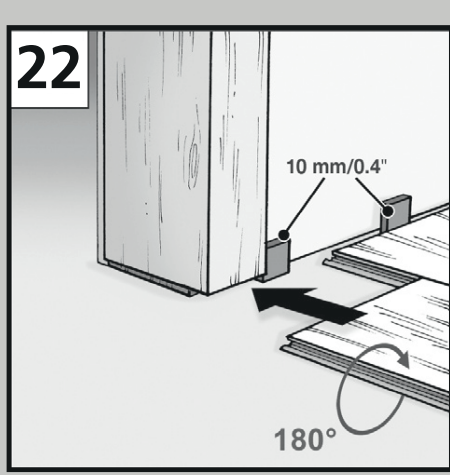
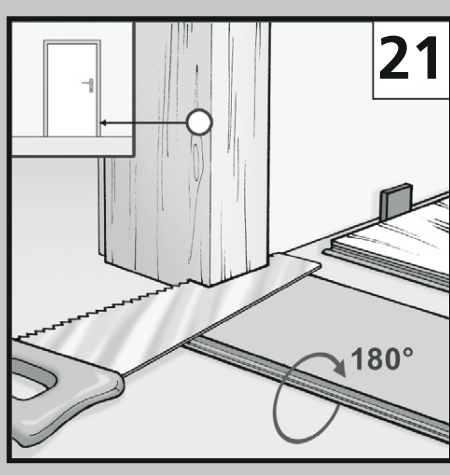
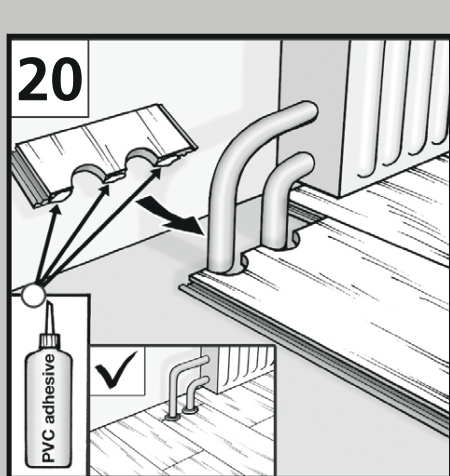
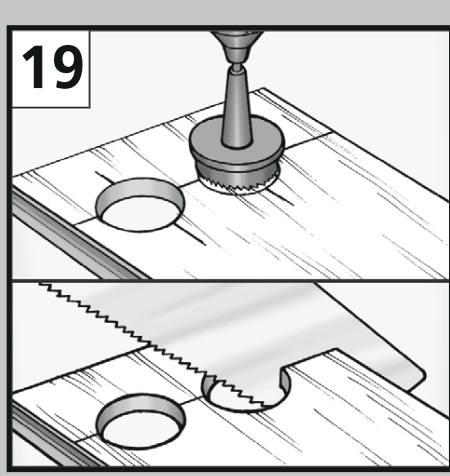
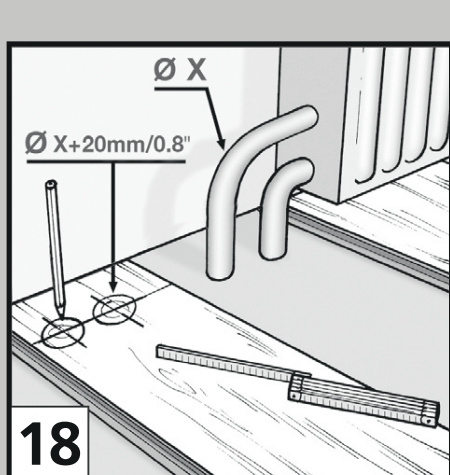
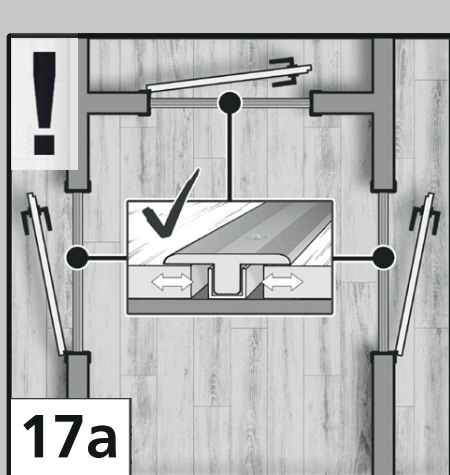
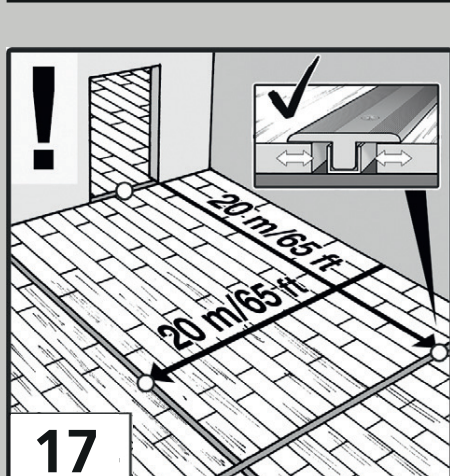
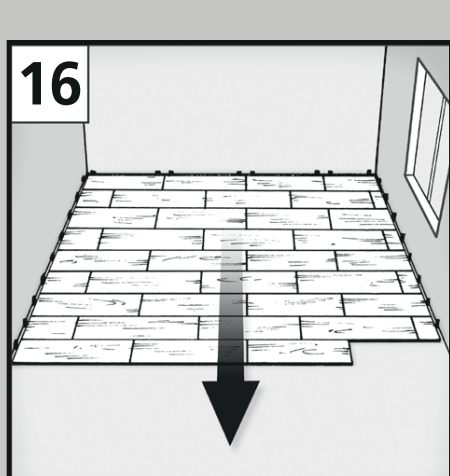
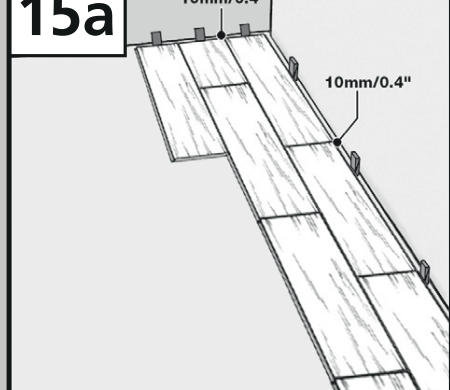
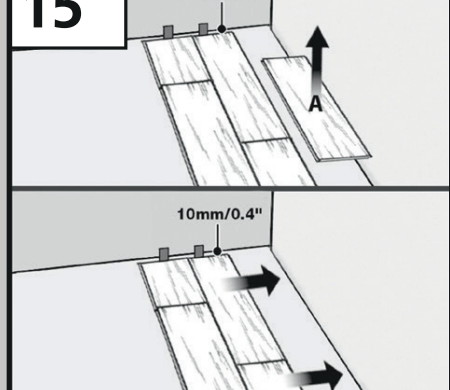
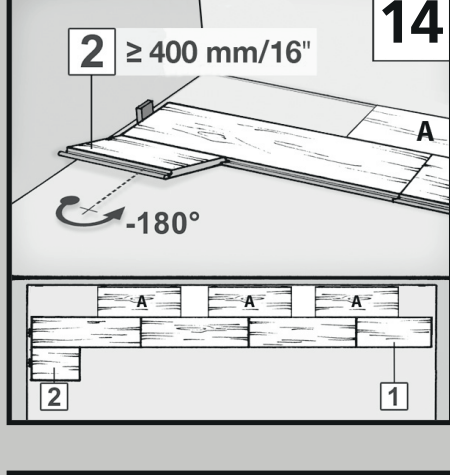
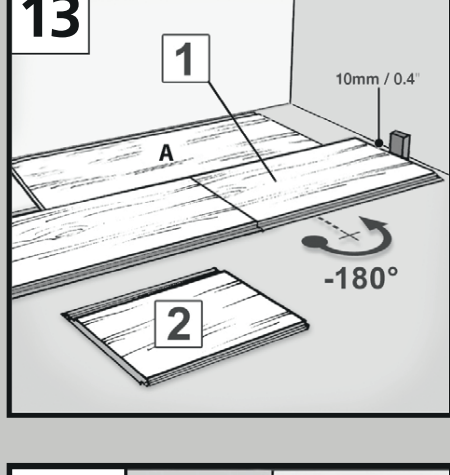
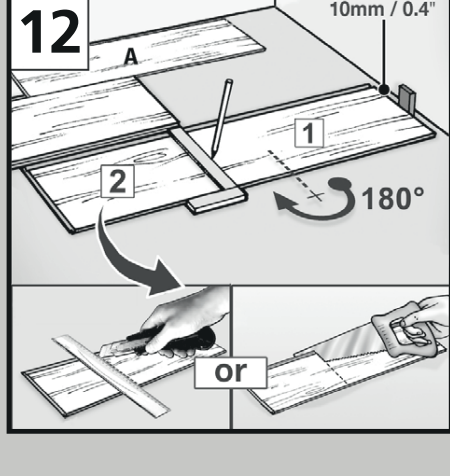
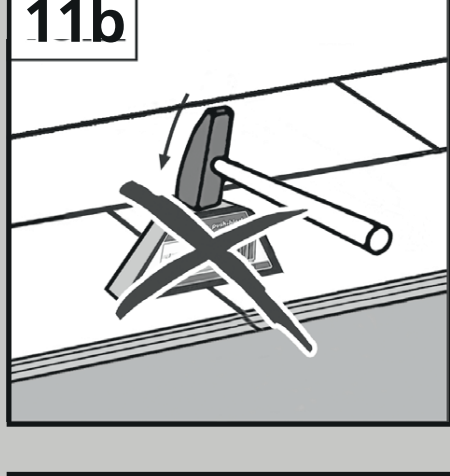
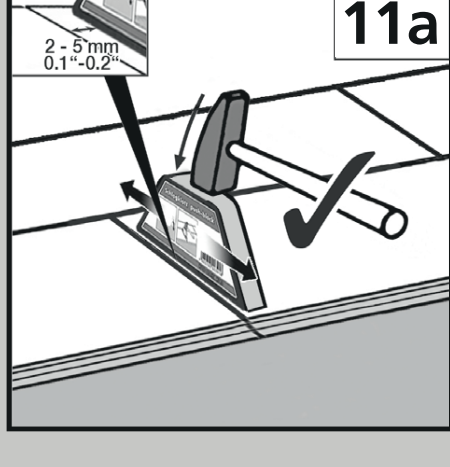
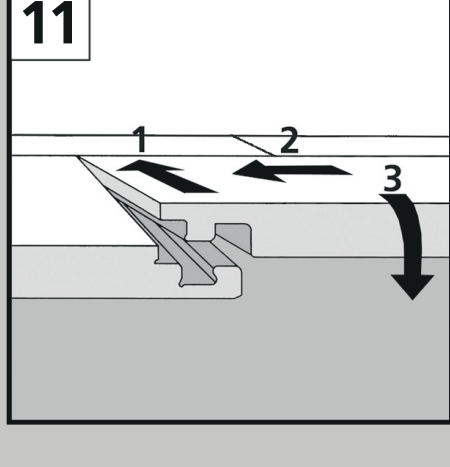
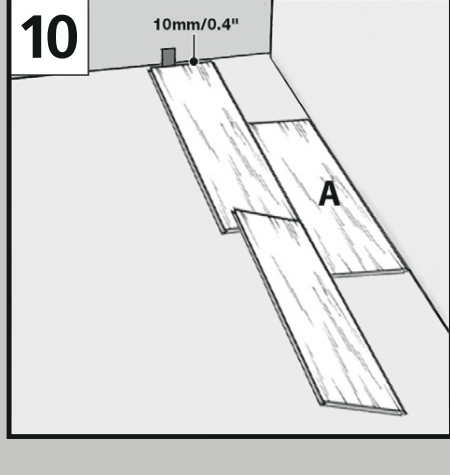
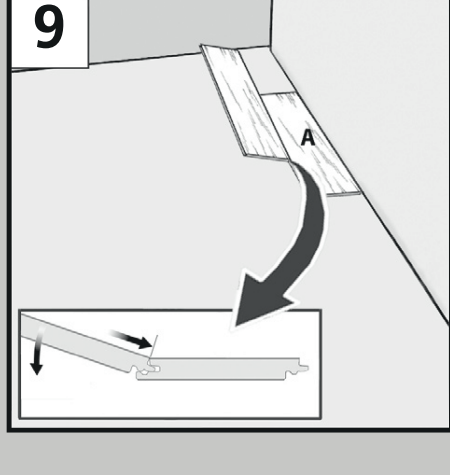
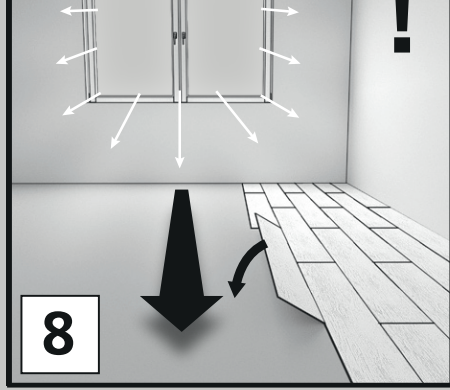
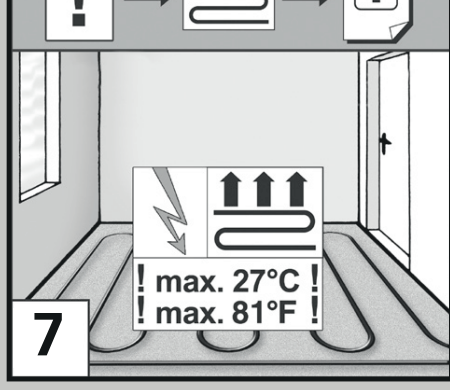
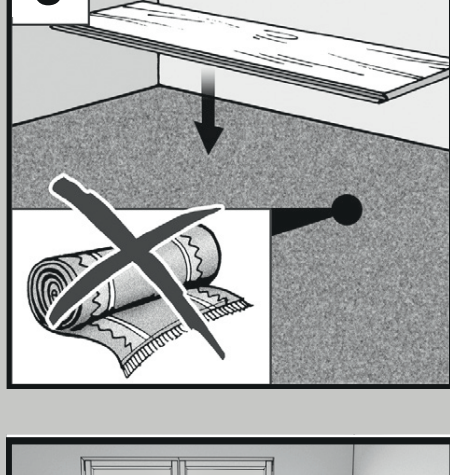
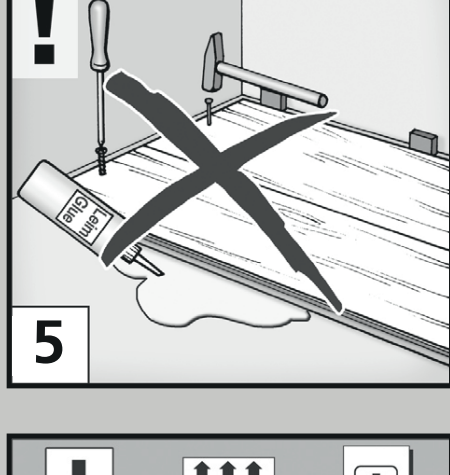
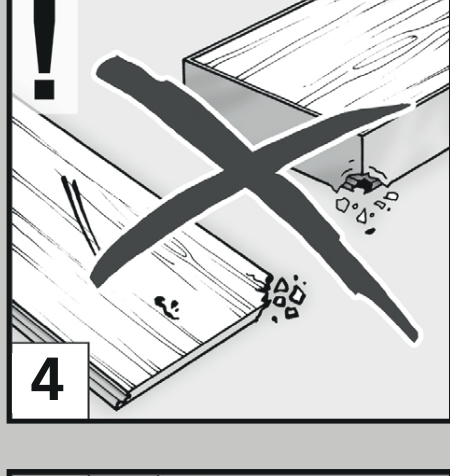


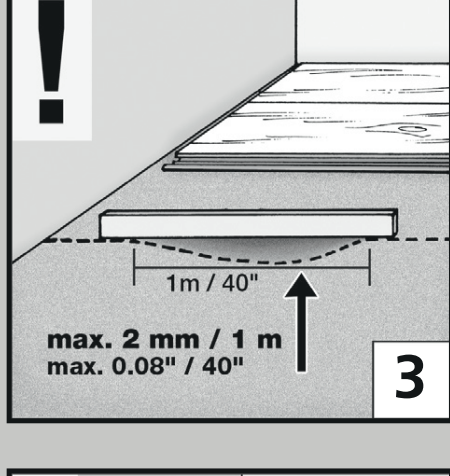

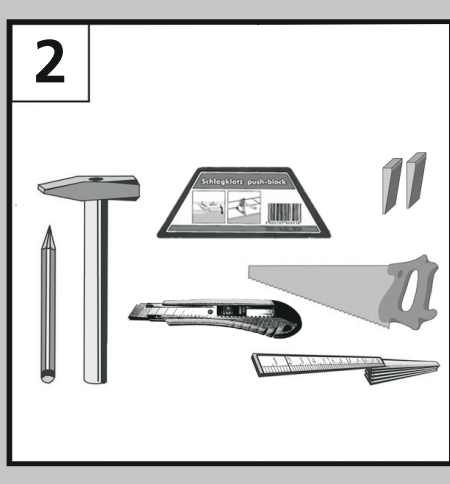

FLOORING collection

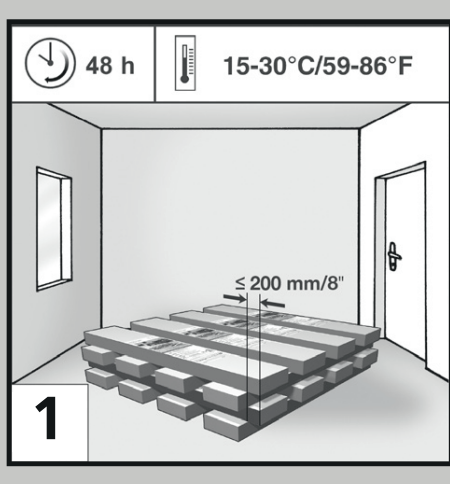

VINYL

SOLID PRO 4.0



BOARDS. FLOORS. IDEAS.



SOLID PRO 4.0


VINYL



25 YEARS
KAINDL GUARANTEE


EN 16511
32





ÉMISSIONS DANS L'AIR INTÉRIEUR
A+
M B C


TÜV PROFI
certified
QUALITÄTSGEPÜRT
schallschluppfähig EPH
PREMIUM


MADE IN EUROPE


Kaindl Fold Down
LOC

SOLID PRO 4.0


VINYL

SPC


FLOORING collection

 48 h


 15-30° C/59-86° F

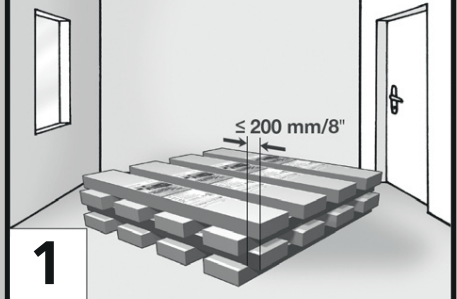


1

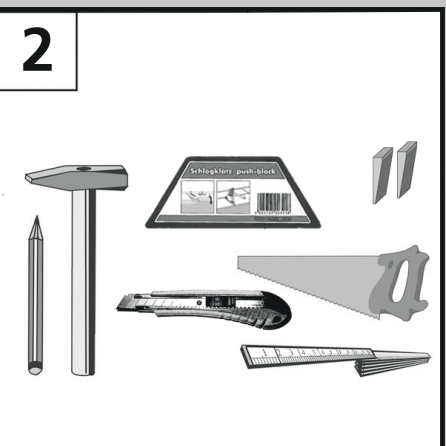


2

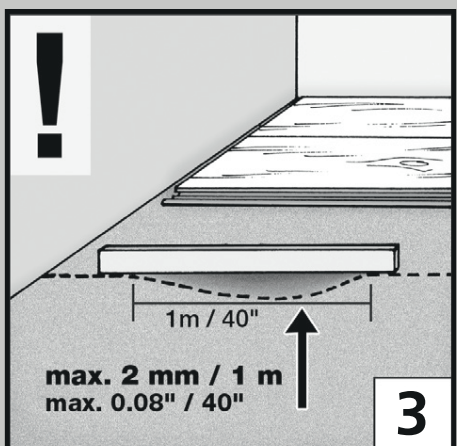
1m / 40"
max. 2 mm / 1 m
max. 0.08" / 40"


3

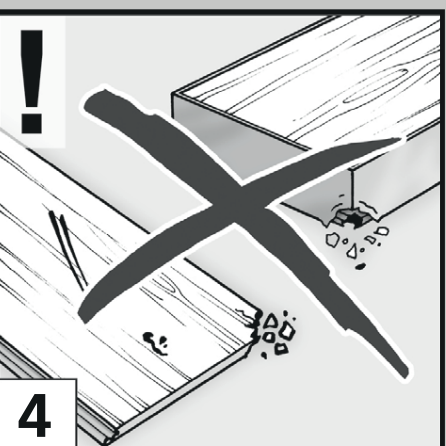


4

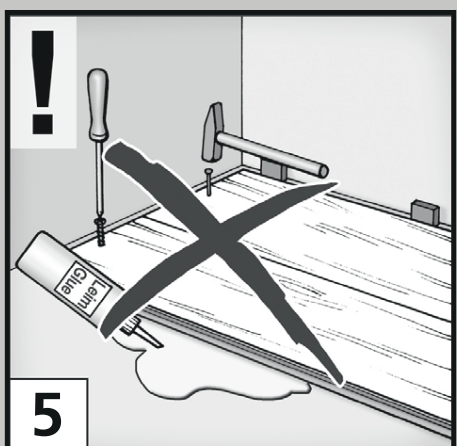


5

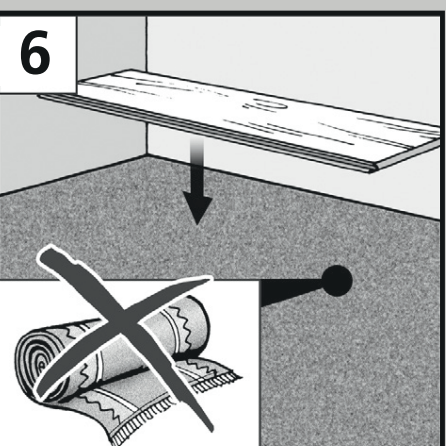


6

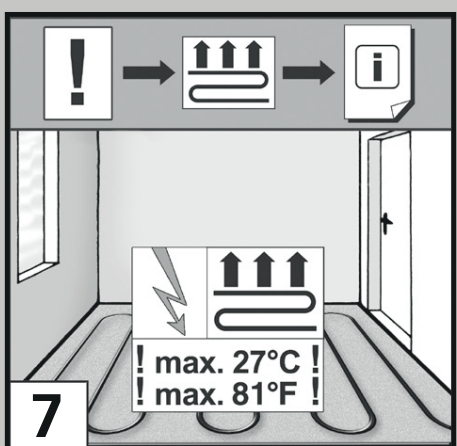
! max. 27°C
! max. 81°F


7

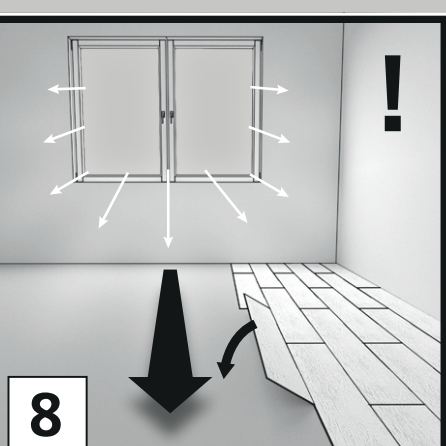


8

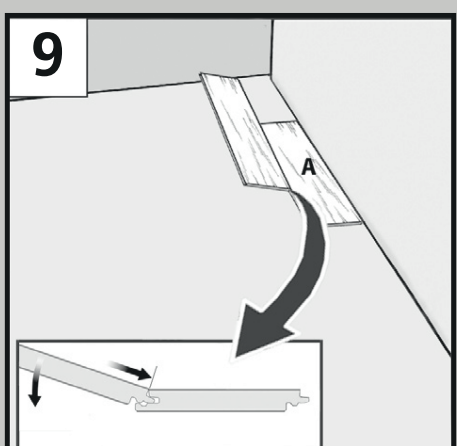


9

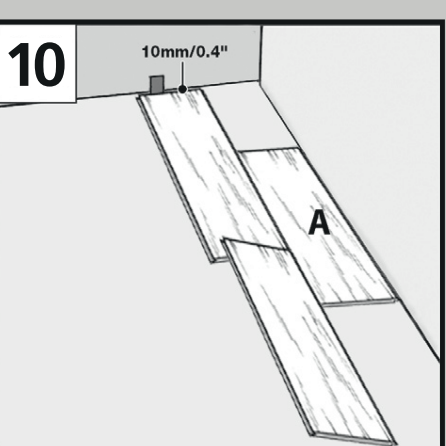


10

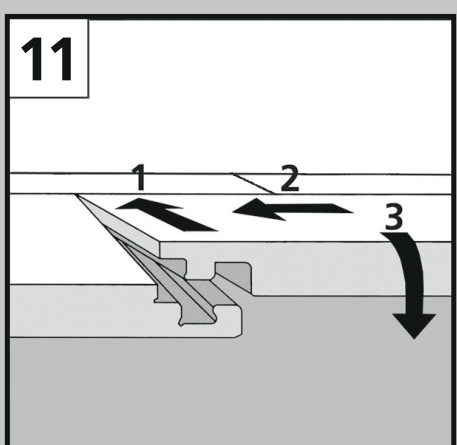


11

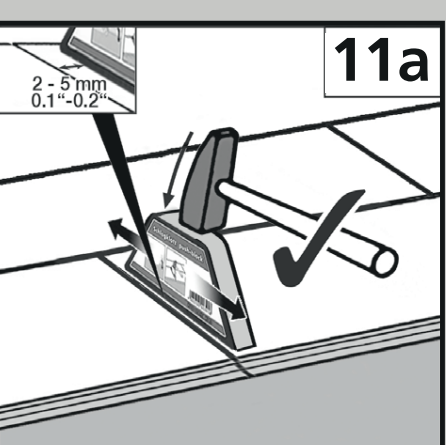


11a

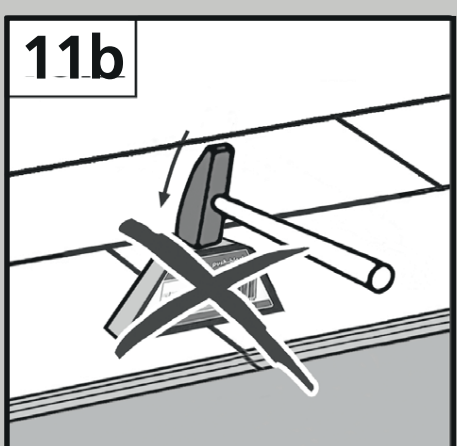


11b

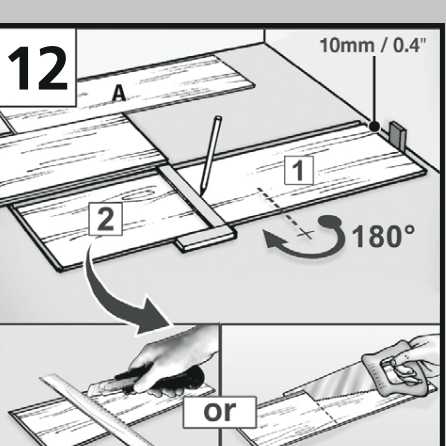


12

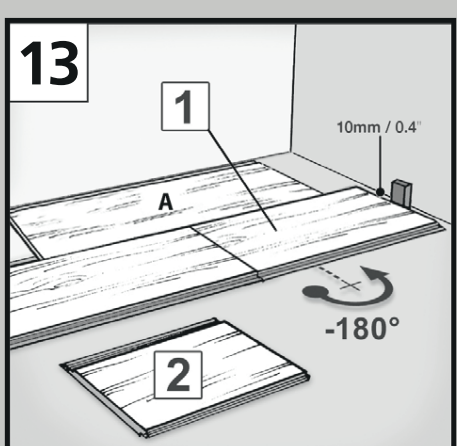


13

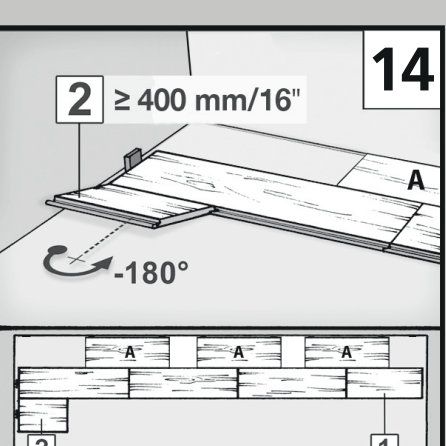


14

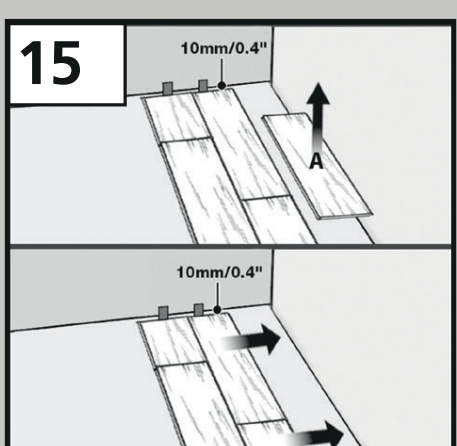


15

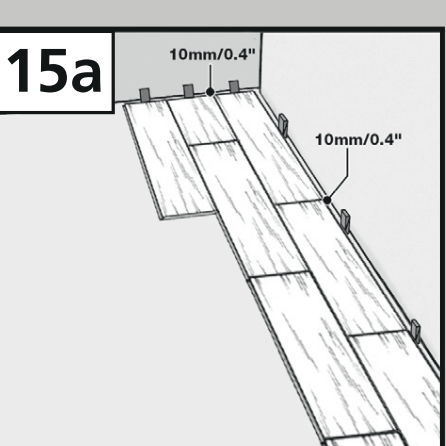


15a

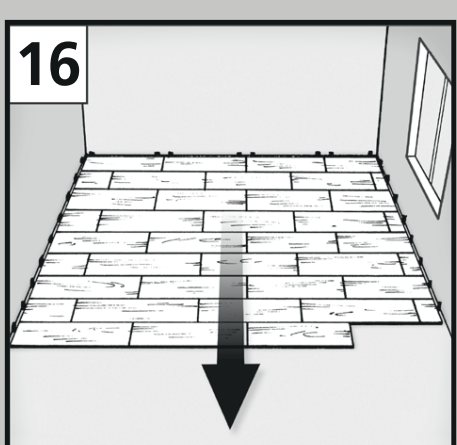


16

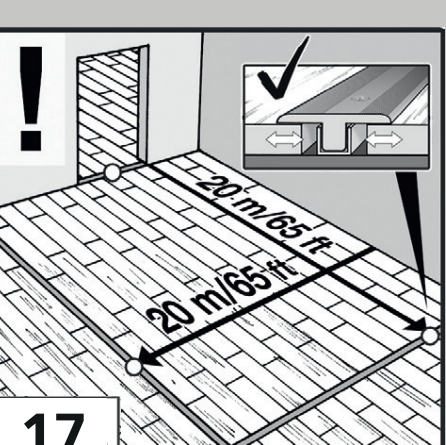


17

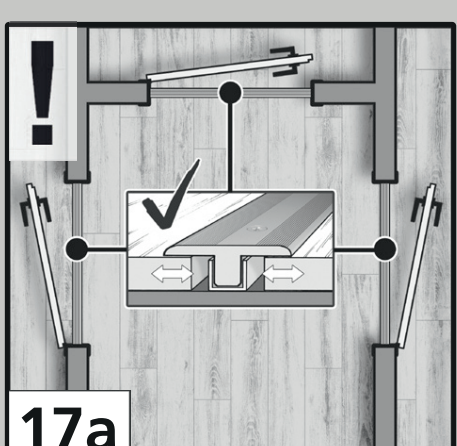


17a

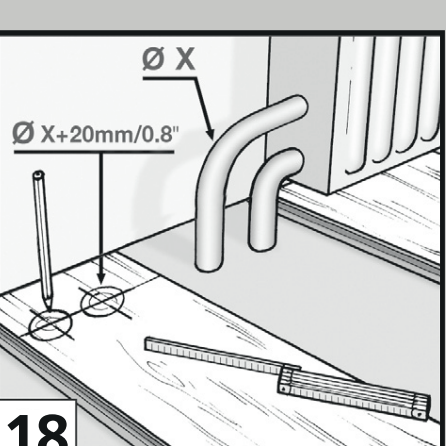


18

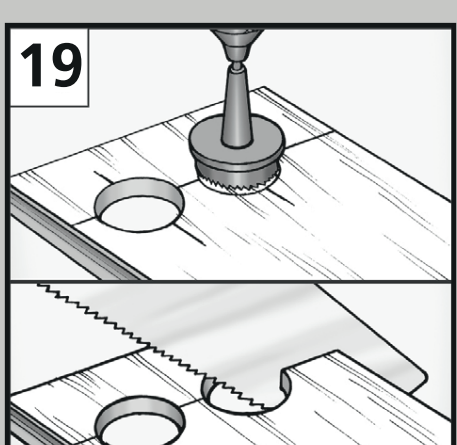


19

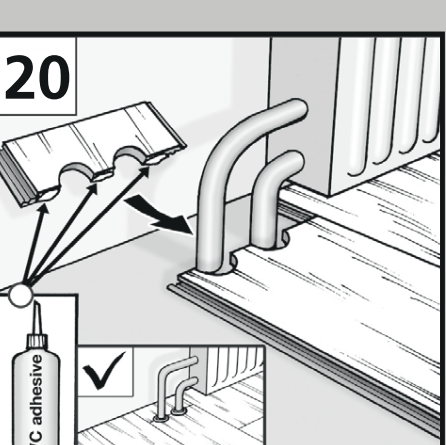


20

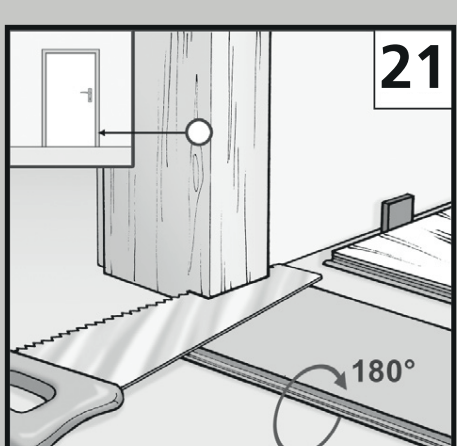


21

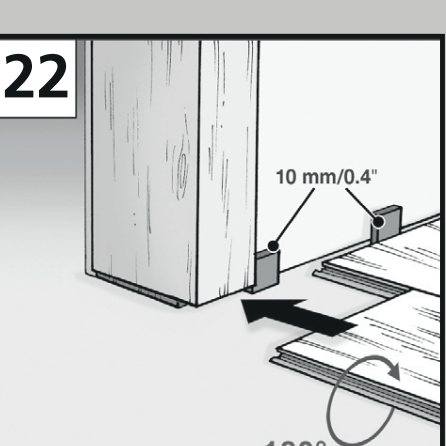


22

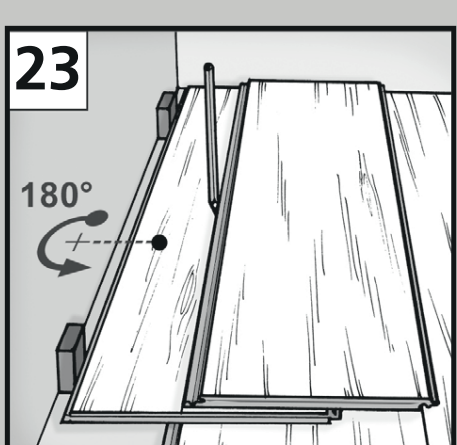


23

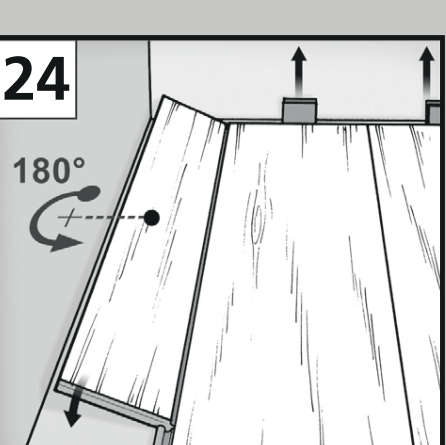


24

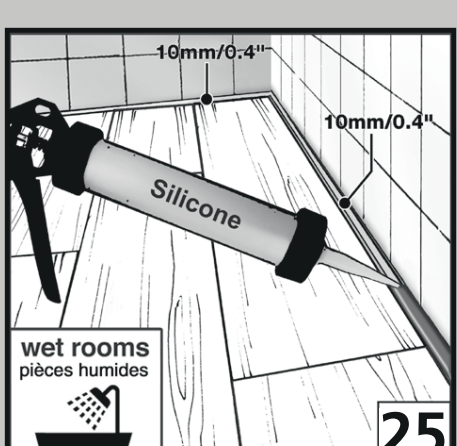

25

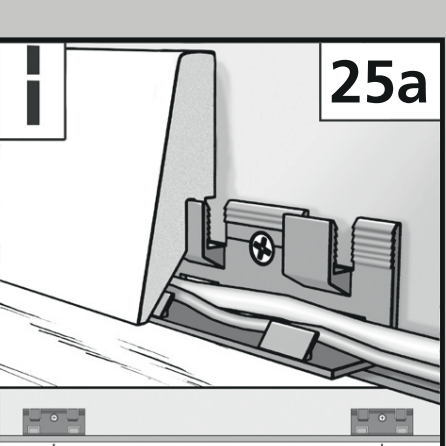

25a

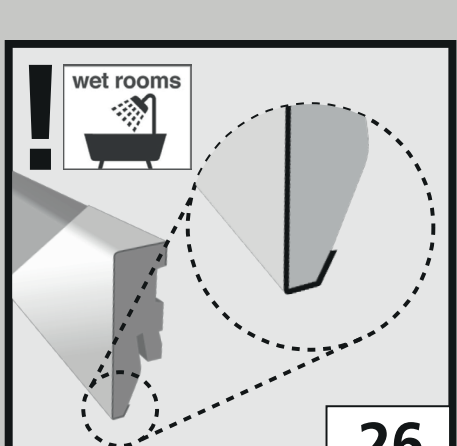


26



27



28

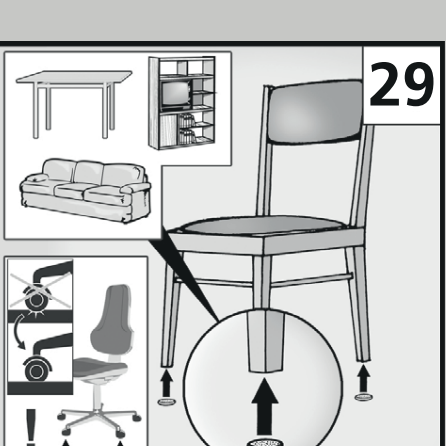

29



FLOORING collection

SPC



VINYL

SOLID PRO 5.0




BOARDS. FLOORS. IDEAS.

SOLID PRO 5.0

VINYL


SPC

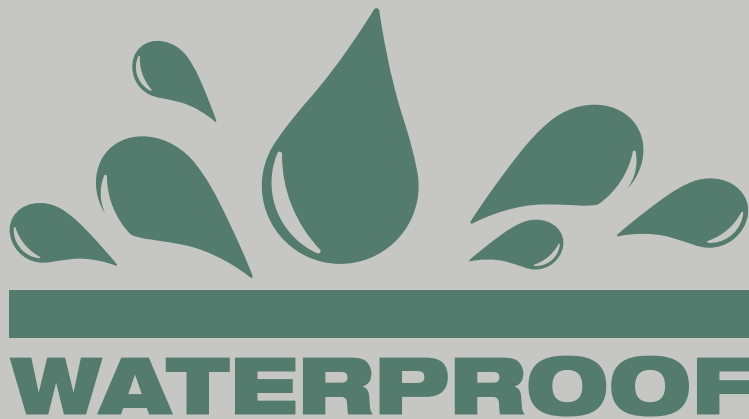

EN 16511



30 YEARS
KAINDL GUARANTEE



*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, prévenant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).



MADE IN EUROPE



SOLID PRO 5.0

VINYL



SPC

FLOORING collection

